



NT 70/2

High capacity powerful wet/dry vacuum cleaner with twin suction motors for heavy-duty use

1 On-board accessory storage

Large bumper with accessory storage.

3 Ergonomic push handle

The NT 70 has an ergonomic push handle for greater manoeuvrability.

2 Integrated drain hose


■ The container is easy to empty via the drain hose. Extremely practical due to the very large 70 litre container capacity.

4 Robust bumper

The robust bumper protects the vacuum cleaner from knocks and bumps.

TECHNICAL DATA AND EQUIPMENT.



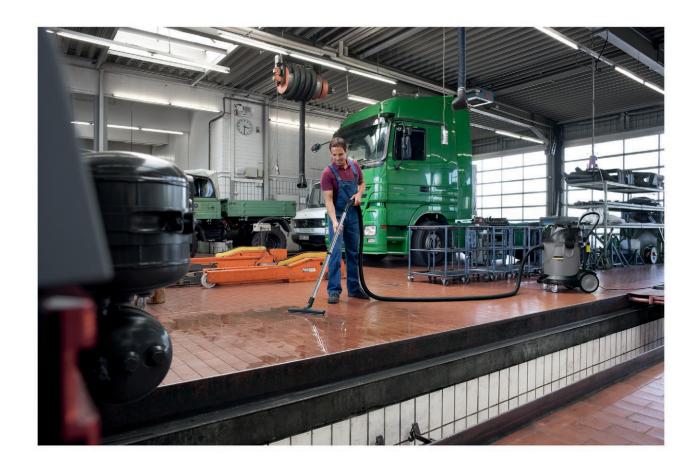

NT 70/2

- Robust bumper, large wheels
- Ergonomic push handleOptional wet filter available

| Order Number | | 1.667-277.0 |
|-------------------------------|------------|------------------|
| EAN code | | 4039784725447 |
| Air flow | I/s | 2 x 74 |
| Vacuum | mbar / kPa | 254 / 25,4 |
| Container capacity | 1 | 70 |
| Max. rated input power | W | 2400 |
| Standard nominal size | | 40 |
| Sound level | dB(A) | 75 |
| Container material | | Plastic |
| Quantity of motors | | 2 |
| Frequency | Hz | 50-60 |
| Voltage | V | 220-240 |
| Weight | kg | 24,9 |
| Dimensions (L x W x H) | mm | 510 × 740 × 1010 |
| | | |
| Equipment | | |
| Suction hose | m | 4 |
| Metal suction tube, 2 x 0.5 m | | I . |
| Filter bag | | Paper |
| Wet and dry floor tool | mm | 400 |
| Crevice nozzle | | 1 |
| Cartridge filter | | I . |
| Cartridge filter | | Paper |
| | | |

■ Included in delivery.

Technical data



























| | _ | | | | 1 | | | | _ |
|---|----|--------------|------------|-------|--------|--------|-------|---|---|
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | Order Number | Quantity | ID | Length | Width | Price | Description | |
| Cartridge filter paper | | | | | | | | | |
| Cartridge filter, paper | 1 | 6.907-038.0 | 1 piece(s) | | | | | Paper cartridge filter (M BIA-C dust class M), suitable as a main filter for dry and wet pick up. | • |
| All-purpose nozzles (wet/dry) | | | | | | | | | |
| | 2 | 2.889-117.0 | 1 piece(s) | ID 40 | | 400 mm | | | |
| | 3 | 6.907-510.0 | 1 piece(s) | ID 40 | | 400 mm | | | |
| Floor tool DN40-370 | 4 | 6.903-018.0 | 1 piece(s) | ID 40 | | 370 mm | | All-purpose aluminium nozzle with 370 mm working width. With height-adjustable side rollers, brush strips (6.903-064.0) and oil-resistant squeegees (6.903-081.0). Only for NT vacuum cleaners. | |
| Floor tool neutrally DN40 | 5 | 6.906-383.0 | 1 piece(s) | ID 40 | | 450 mm | | All-purpose aluminium nozzle (DN 40) with 450 mm working width. With height-adjustable side rollers, brush strips (6.903-065.0) and oil-resistant squeegees (6.906-146.0). Only for NT vacuum cleaners. | |
| Floor tool neutrally DN35 | 6 | 6.906-384.0 | 1 piece(s) | ID 35 | | 370 mm | | All-purpose aluminium nozzle (DN 35) with 370 mm working width. With height-adjustable side rollers, brush strips (6.903-064.0) and oil-resistant squeegees (6.903-081.0). Only for NT vacuum cleaners. | |
| Floor tool DN35 | 7 | 6.906-513.0 | 1 piece(s) | ID 35 | | 360 mm | | All-purpose plastic nozzle (DN 35) with 360 mm working width. With side rollers, brush strips (6.905-878.0) and squeegees (6.905-877.0). Only for NT vacuum cleaners. | |
| Crevice nozzles | | | | | • | | | | |
| Crevice nozzle DN40 | 8 | 6.903-033.0 | 1 piece(s) | ID 40 | 290 mm | | | Plastic crevice tool (DN 40) for vacuuming in crevices and corners. Length: 290 mm. | • |
| Crevice nozzle DN35 | 9 | 6.900-385.0 | 1 piece(s) | ID 35 | 210 mm | | | Plastic crevice tool (DN 35) for vacuuming in crevices and corners. Length: 210 mm. | |
| Crevice nozzle | 10 | 6.900-922.0 | 1 piece(s) | ID 35 | 500 mm | | | Plastic crevice tool (DN 35) for vacuuming in crevices and corners. Length: 370 mm. | |
| Crevice nozzle DN40 | 11 | 6.905-817.0 | 1 piece(s) | ID 40 | 400 mm | | | Metal crevice tool (DN 40) for vacuuming in crevices and corners. Length: 400 mm. | |
| Suction tubes metal | | | | , | | | | | |
| Suction tube | 12 | 6.900-275.0 | 1 piece(s) | ID 40 | 0,5 m | | | Chromium-plated metal suction tube (DN 40, 1x0.5 m), standard for virtually all two-motor industrial vacuum cleaners. Optional for industrial single-motor NT vacuum cleaners with DN 40 suction hose. | • |
| Suction tube DN35 | 13 | 6.900-514.0 | 1 piece(s) | ID 35 | 0,5 m | | | Chromium-plated metal suction tube (DN 35, 1x0.5 m), standard for virtually all single-motor industrial NT vacuum cleaners. | |
| Suction hoses complete (Clip-syste | 1 | | | | 1 | | | | |
| Suction hose | 14 | 4.440-678.0 | 1 piece(s) | ID 40 | 4 m | | | 4 m electrically non-conductive suction hose with bend, bayonet at vacuum end and C 40 clip connection at accesso- ry end. Without module. | • |
| | 15 | 4.440-784.0 | 1 piece(s) | ID 40 | 16 m | | | 16 m suction hose (C-DN 40) with bayonet and straight adapter. | |
| Membrane filter / fabric filter Membrane filter/fabric filter | 16 | 6.904-282.0 | 1 piece(s) | | | | | Polyester needle fleece membrane/fabric filter - BIA-C -, washable up to 40°C, metal fibres for earthing. Suitable for virtually all industrial two-motor NT vacuum cleaners. | |
| Paper filter (2 ply) Filter bags 5StNT 65/2 ECO | 17 | 6.904-285.0 | 5 piece(s) | | | | | 5 3-ply, tear-resistant paper filter bags. BIA-(U, S, G, C) dust class M. For all NT 48/1, NT 65/2 Eco + Me and NT 72/2 Eco Tc models. | |

























| | | Order Number | Quantity | ID | Length | Width | Price | Description | |
|--------------------------------------|----|--------------|-------------|-------|--------|--------|-------|---|--|
| Plastic sacks for dust-free disposal | | | | | 1 | | | | |
| Plastic sacks for dust-free disposal | 18 | 6.900-698.0 | 10 piece(s) | | | | | PE plastic sack. | |
| Special filter bags, wet filter bags | | | | | | | | | |
| Special filter bags, wet filter bags | 19 | 6.904-252.0 | 5 piece(s) | | | | | Approved for dust class L, general cleaning, wet and dry, tear-resistant. | |
| Bend stainless | | | ı | | | | | | |
| Bend, stainless steel ID 35 | | 6.903-141.0 | 1 piece(s) | ID 35 | | | | | |
| Bend, stainless steel ID 40 | 21 | 6.902-079.0 | 1 piece(s) | ID 40 | | | | Stainless steel and crooked, ID 40 | |
| Plastic bend | | 1 | | 1 . | 1 | ı | | 1 | |
| Plastic bend | 22 | 5.031-718.0 | 1 piece(s) | ID 35 | | | | Plastic bend (DN 35) with C-35 clip system. For all industrial single-motor NT 361 to NT 611 Eco models (except NT Eco M and NT Eco H). | |
| | 23 | 5.031-939.0 | 1 piece(s) | ID 35 | | | | Electrically conductive plastic bend (DN 35) with C-35 clip | |
| | 24 | 5.032-427.0 | 1 piece(s) | ID 40 | | | | Flostrically conductive plastic bond (DN 40) with C 40 clin | |
| Bend metal | | | | , | | | | | |
| Bend, DN 35, metal | 25 | 6.900-519.0 | 1 piece(s) | ID 35 | | | | Robust, chromium-plated metal bend (DN 35), can be used instead of a plastic bend (with clip system adapter 5.407-112.0; C 35-DN 35, plastic, el.). | |
| Bend, DN 40, metal | 26 | 6.900-276.0 | 1 piece(s) | ID 40 | | | | Robust, chromium-plated metal bend (DN 40), can be used instead of a plastic bend (with clip system adapter 5.407-111.0; C 40-DN 40, plastic, el.). | |
| All-purpose brushes | | | | | | | | | |
| All-purpose brush | 27 | 6.903-863.0 | 1 piece(s) | ID 35 | 120 mm | | | Natural bristles (ox hair), bristle element 120 x 45 mm. | |
| Car cleaning nozzles | | | | | | | | | |
| Car nozzle | 28 | 6.900-952.0 | 1 piece(s) | ID 40 | | 90 mm | | Angled, flat, plastic car vacuuming tool with about 90 mm working width. Only for NT vacuum cleaners. | |
| Gangway nozzles | | | | | | | | | |
| Gangway nozzle | 29 | 4.130-432.0 | 1 piece(s) | ID 40 | | 644 mm | | Vacuuming larger Areas in connection with NT 70/1; NT 70/2 or NT 70/3 versions only. | |
| Rubber tool | | 1 | ĺ | 1 | 1 | ı | ı | | |
| Rubber nozzle, ID 40 | 30 | 4.763-057.0 | 1 piece(s) | 40 | | | | Rubber. | |
| Rubber suction tools, nose 45° | | 1 | 1 | 1 | 1 | ı | ı | 1 | |
| Rubber suction tools, nose 45° | 31 | | 1 piece(s) | ID 35 | 220 mm | | | for vacuuming machines. Only for NT vacuum cleaners. | |
| | 32 | 6.902-105.0 | 1 piece(s) | ID 40 | 220 mm | | | 45° rubber suction nozzle (DN 40), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners. | |
| Radiator brushes | | | 1 | | | ı | 1 | To vaccoming machines. Only for the vaccom electricis. | |
| Brush heating element | 33 | 6.903-034.0 | 1 piece(s) | ID 35 | | | | Radiator brush is suitable for crevice tool 6.900-385.0 or 6.905-240.0. | |
| Pipe dusting nozzles | | | | | | | | | |
| BRUSH | 34 | 6.903-035.0 | 1 piece(s) | ID 35 | | | | | |
| | 35 | 6.903-036.0 | 1 piece(s) | ID 35 | | | | Plastic, pipe diameter 200 mm | |
| Suction brushes | | 1 | | 1 . | 1 | 1 | | 1 | |
| Suction brush DN35 | 36 | 6.903-862.0 | 1 piece(s) | ID 35 | | 70 mm | | Rotatable suction brush (DN 35) with natural bristles (cow hair). Bristle size 70x45 mm. Only CV and NT vacuum cleaners. | |
| Suction brush DN32 | 37 | 6.903-887.0 | 1 piece(s) | ID 32 | | 70 mm | | Botatable custion brush (DN 22 plactic) with DA bristles | |































| | | T | | 1 | | | 1 | | _ |
|---|----|--------------|------------|-------|--------|-------|-------|---|------|
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | Order Number | Quantity | ID | Length | Width | Price | Description | |
| Suction tubes stainless steel | | | | | | | 1 | | |
| Suction tube, ID 40 | 38 | 6.902-081.0 | 1 piece(s) | ID 40 | 0,5 m | | | Stainless steel suction tube (DN 40, 0.5 m) only suitable for NT vacuum cleaners. | |
| Suction tube | 39 | 6.906-531.0 | 1 piece(s) | ID 40 | 1 m | | | Stainless steel suction tube (DN 40, 1.0 m) only suitable for NT vacuum cleaners. | . [|
| Suction tube, DN 35 | 40 | 6.902-154.0 | 1 piece(s) | ID 35 | 0,5 m | | | | |
| Repair kits | | | | | | | , | | |
| Repair set, C 40 | 41 | 2.639-873.0 | 1 piece(s) | ID 40 | | | | Repair set (C40) includes threaded hose adapters (without bayonet adapter) for industrial NT vacuum cleaners with cli system. | ір□ |
| Repair kit ID 61 | 42 | 2.862-038.0 | 1 piece(s) | ID 61 | | | | Suction hose repair kit. Optional for all NT 65/2 and 72/2, NT 993 I, NT 802 I. | |
| Suction hoses (Clip-system) | | | | | | | | | |
| Suction hose (clip system), C 40, 10 m | 43 | 6.906-279.0 | 1 piece(s) | 40 | 10 m | | | 10 m standard suction hose without bend and adapter. Witl bayonet at vacuum end and C 40 clip connection at accessory end. | |
| Suction hose | 44 | 6.906-321.0 | 1 piece(s) | 40 | 4 m | | | 4 m suction hose with bayonet and C 40 clip connection. Without bend and adapter. | |
| | 45 | 6.906-546.0 | 1 piece(s) | 40 | 4 m | | | Electrically conductive, 4 m suction hose with bayonet and 40 clip connection. Without bend and adapter. | C |
| Suction hose (Clip-system), C 40, 16 m | 46 | 6.906-635.0 | 1 piece(s) | 40 | 16 m | | | With bayonet and clip connection. | |
| Suction hose (clip system), C 40, 10 m, el. | 47 | 6.906-877.0 | 1 piece(s) | 40 | 10 m | | | Suction hose with bayonet coupling, electrically conductive | . [|
| Suction hoses complete | | | | | | | | | |
| Suction hose, complete | 48 | 4.440-264.0 | 1 piece(s) | ID 61 | 4 m | | | 4 m standard suction hose with DN 61 bayonet at vacuum end and DN 61 cone at accessory end. | |
| Suction hose complete, ID 61, smooth inside | 49 | 4.440-328.0 | 1 piece(s) | ID 61 | 3 m | | | Industrial hose, PVC/elastomer with steel spiral, smooth inside. | |
| Suction hose, complete, DN 61, 10 m | 50 | 4.440-467.0 | 1 piece(s) | ID 61 | 10 m | | | 10 m standard suction hose with DN 61 bayonet at vacuum end and DN 61 cone at accessory end. | ا ا |
| Suction hose complete, ID 61, 4 m, oil-resistant | 51 | 4.440-613.0 | 1 piece(s) | ID 61 | 4 m | | | Oil-resistant. | |
| Suction hose, complete | 52 | 4.440-614.0 | 1 piece(s) | ID 61 | 10 m | | | | |
| Suction hose complete, ID 61, 4 m, el. | 53 | 4.440-616.0 | 1 piece(s) | ID 61 | 4 m | | | Electrically conductive. | |
| Suction hose, complete | 54 | 4.440-263.0 | 1 piece(s) | ID 40 | 4 m | | | Electrically non-conductive 4.0m standard suction hose wit bayonett at vacuum end and DN 40 cone at accessory end. | h [|
| Suction hose complete, ID 40, 4 m, oil-resistant, | 55 | 4.440-303.0 | 1 piece(s) | ID 40 | 4 m | | | Oil-resistant. | |
| Suction hose, complete | 56 | 4.440-463.0 | 1 piece(s) | ID 40 | 10 m | | | Electrically non-conductive 10.0m standard suction hose with bayonett at vacuum end and DN 40 cone at accessory end. | |
| Suction hose complete | 57 | 4.440-466.0 | 1 piece(s) | ID 40 | 10 m | | | Electrically conductive, 10.0m, ID 40 | |
| Suction hose complete, ID 40, 10 m, oil-resistant | 58 | 4.440-612.0 | 1 piece(s) | ID 40 | 10 m | | | Oil-resistant. | |
| Connecting sleeves | | | | | | | | | Ţ |
| Connecting sleeve, ID 27, el. | 59 | 4.453-006.0 | 1 piece(s) | ID 27 | | | | For connecting 2 suction hoses, thread on both sides, electrically conducitve. | |
| Adapter, DN 32/35, with internal thread | 60 | 6.902-077.0 | 1 piece(s) | ID 32 | | | | Electrically non-conductive adapter with internal thread. For connecting two suction hoses without connectors. Suitable for DN 32 or DN 35. | or _ |































| | | Order Number | Quantity | ID | Length | Width | Price | Description | |
|--|----------|--------------|------------|--------|----------|-------|-------|--|-----|
| Adapter, DN 40 with internal thread | 61 | 6.900-286.0 | 1 piece(s) | ID 40 | | | | Electrically non-conductive adapter with screw thread at both ends. For connecting 2 DN 40 suction hoses without connectors. | |
| Connecting sleeve, ID 61, with female thread | 62 | 6.902-078.0 | 1 piece(s) | ID 61 | | | | For connecting 2 suction hoses, thread on both sides | |
| Extension hoses (Clip-system) | | | | | · | | | | |
| Extension hose, C 40 | 63 | 6.906-344.0 | 1 piece(s) | ID 40 | 2,5 m | | | 2.5 m electrically non-conductive standard extension hose for all C-40 hoses with clip system. | |
| Other | | | | | <u> </u> | | | | Ť |
| Pre-separator | 64 | 3.864-010.0 | 1 piece(s) | | | | | | [|
| Barrel separator | 65 | 3.864-012.0 | 1 piece(s) | | | | | | Ī |
| Lid for separator | 66 | 4.063-132.0 | 1 piece(s) | | | | | | Ī |
| CS 40 Me | 67 | 2.863-026.0 | 1 piece(s) | | | | | | Ī |
| Y-adapter kit | | | | | | | | | _ |
| Y-adapter kit | 68 | 2.637-217.0 | 1 piece(s) | ID 35 | | | | Plastic distributor - suitable for NT vacuum cleaners. | |
| Connecting sleeve C-DN (clip on ta | _ | | | 1.2.00 | | | | | _ |
| C-ID 35 adapter | 1 | 5.407-112.0 | 1 piece(s) | ID 35 | | | | Connects C 35 hose for ID 35, electrically conductive. | I |
| Adapter (tube -> nozzle) | 03 | 3.407 112.0 | I piece(s) | 18 33 | | | | connects c 33 nose for 18 33, electrically considerive. | + |
| Adapter | 70 | 5.453-019.0 | 1 piece(s) | ID 40 | | | | From DN 40 to DN 61: Plastic adapter (electrically non-conductive). Suitable for NT vacuum cleaners. | |
| Reducing sleeves | | | | | · · | | | | |
| Reducer | 71 | 5.407-108.0 | 1 piece(s) | ID 40 | | | | Threaded reducer - from C-40 to DN 35. Suitable for NT vacuum cleaners. | |
| Sleeve C40 / C35 | 72 | 5.407-113.0 | 1 piece(s) | ID 40 | | | | Reducer (C 40 to C 35) for connecting accessories with C-35 clip connection to suction hoses with C 40 clip system. | |
| Reducer (tube -> nozzle) | | | | | | | | | |
| Reducer | 73 | 6.902-017.0 | 1 piece(s) | ID 40 | | | | Reducer for accessory extension. Ideal for accessories with DN 35 connecting cone in combination with accessories witl DN 40 connecting cone. | h l |
| Reducer from ID 35 to 32 | 74 | 6.902-072.0 | 1 piece(s) | ID 35 | | | | Reducer with internal connecting cone DN 32. Ideal for accessories from the industrial vacuum cleaner range in combination with industrial NT vacuum cleaners. | |
| Target group specific vacuum clea | ner acco | essory sets | | | | | | | |
| Professional cleaning kit ID 40 | 75 | 2.637-353.0 | | ID 40 | | | | Individual parts: Suction hose 4 m (4.440-263.0), bend, metal (6.900-276.0), suction tube 2 x 0.5 m, metal (6.900-275.0), grout nozzle (6.903-033.0), floor nozzle with rollers (6.903-051.0). | |
| Car cleaning kit | 76 | 2.862-166.0 | | ID 35 | | | | Contains: - Car cleaning nozzle ID 35 - Upholstery/crevice tool ID 35 - Suction brush ID 35 - Connecting sleeve C 35/ ID 35 | |
| Chip cleaning kit | 77 | 2.640-760.0 | | ID 61 | | | | Individual parts: suction hose 4 m, oil-proof (4.440-613.0), crevice tool (6.900-222.0), rubber suction nozzle angled at 45° (6.902-106.0). | |
| Coarse filter for wet pickup | | | | | | | | | |
| Foam filter | 78 | 2.889-083.0 | 1 piece(s) | | | | | Not suitable for dry vacuuming. | |

[■] Included in delivery.

Available accessories.









| | | Order Number | Quantity | ID | Length / width | Price | Description | |
|------------------------------------|---|--------------|------------|--------|-------------------|-------|--|---|
| Other nozzles | | | • | | - | | | Н |
| | | | | 1,5,64 | l | | L | |
| 45° rubber suction nozzle | 1 | 6.902-106.0 | 1 piece(s) | ID 61 | 220 mm | | Angled 45°, for suction of machines, oil-resistant | Ш |
| Metal scratcher and scraper nozzle | 2 | 6.903-360.0 | 1 piece(s) | ID 61 | 104 mm | | Scratcher and scraper tool DN 61, sheet metal, 117 mm | |
| Aluminium surface nozzle | 3 | 4.130-415.0 | 1 piece(s) | ID 61 | 200 mm | | Flat surface nozzle cpl. DN 51, 200 mm, aluminium with | |
| | | | | | | | brush and stainless steel bumper | ш |

[■] Included in delivery.

Available accessories.



| | | Order Number | | | | | Price | Description | |
|---------------|---|--------------|--|--|--|--|-------|---|---|
| | | | | | | | | | _ |
| Suction hoses | | | | | | | | | |
| | 1 | 2.639-905.0 | | | | | | Repair kit for all C-40 and ID 40 hoses | |

[■] Included in delivery.

Available accessories.